
FIG. 1

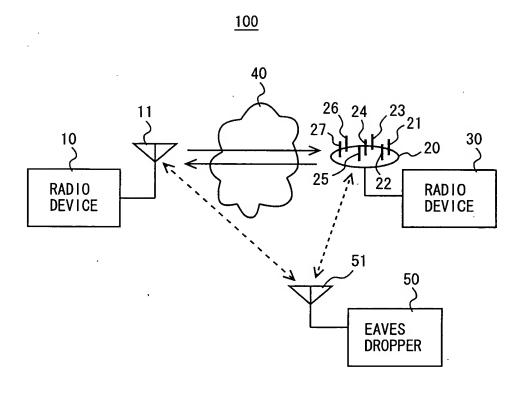

F I G. 2




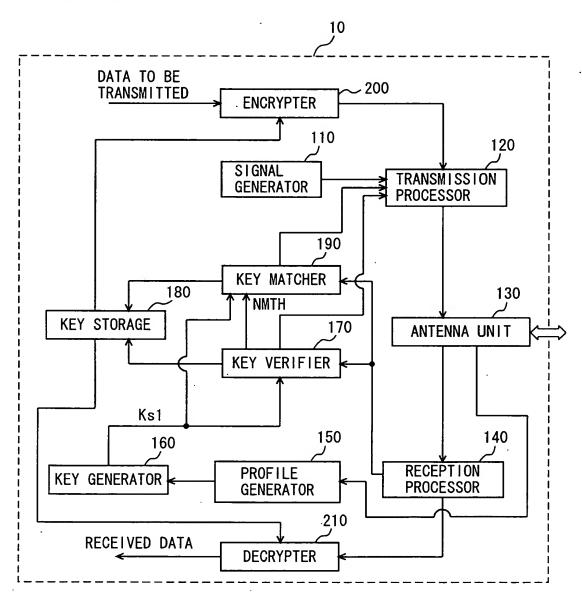


FIG. 3

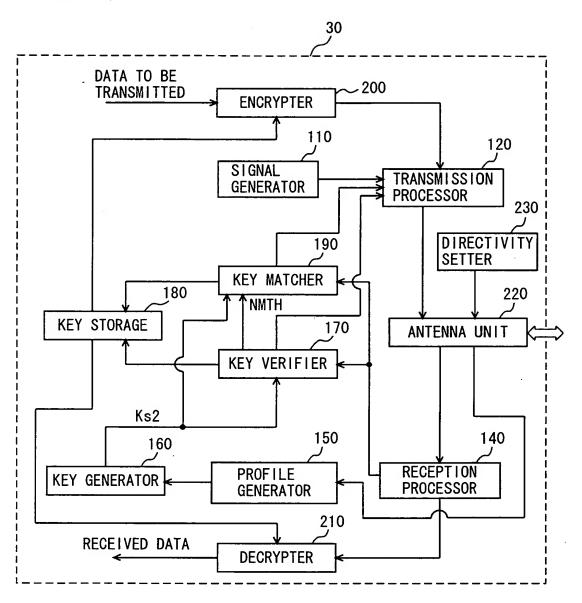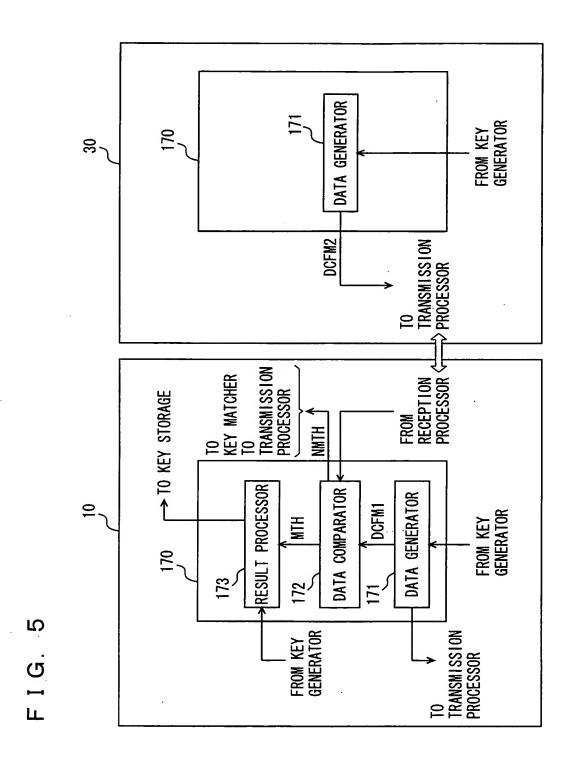

F I G. 4







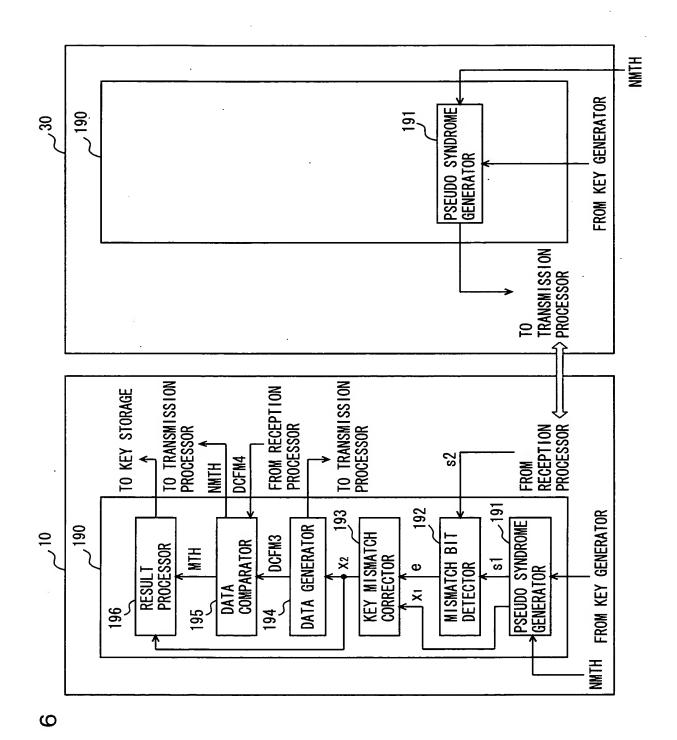


FIG.

F I G. 7

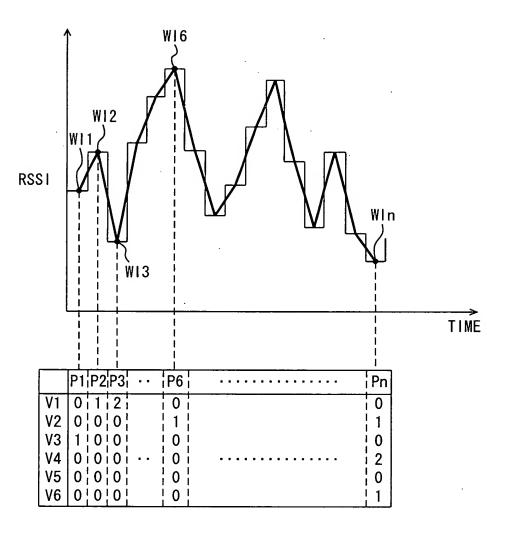

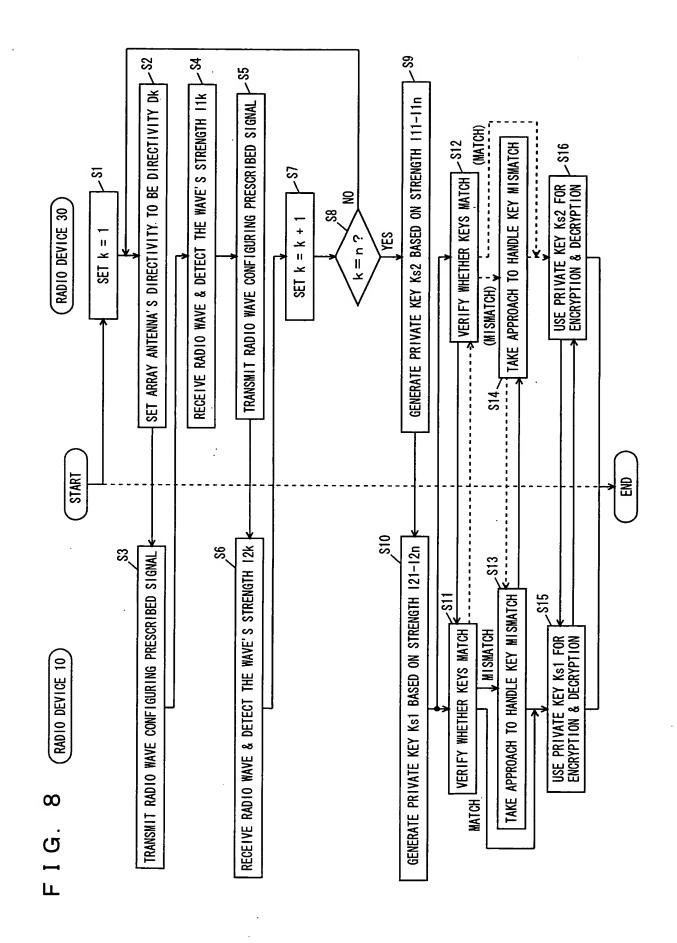

F I G. 9


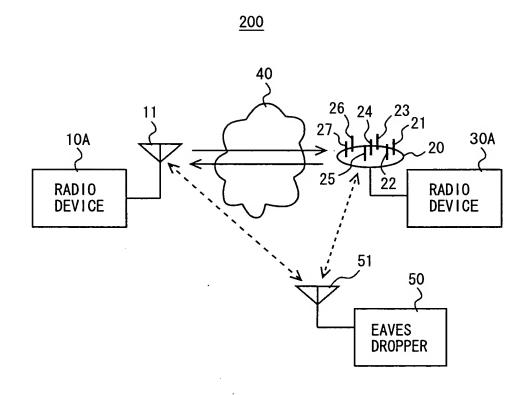


FIG. 10

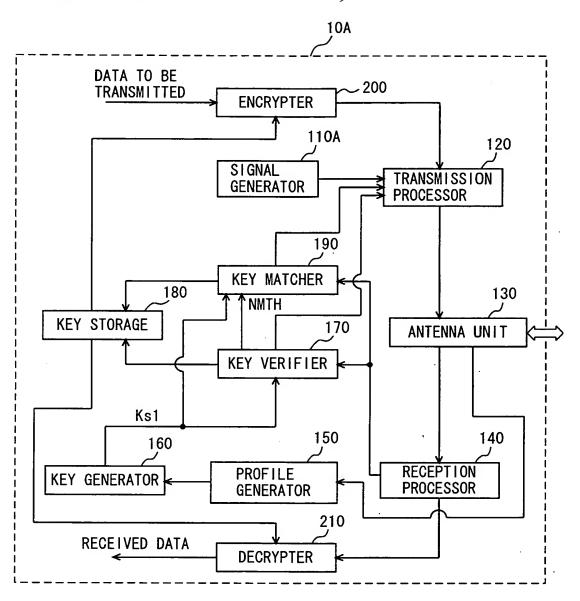

F I G. 11


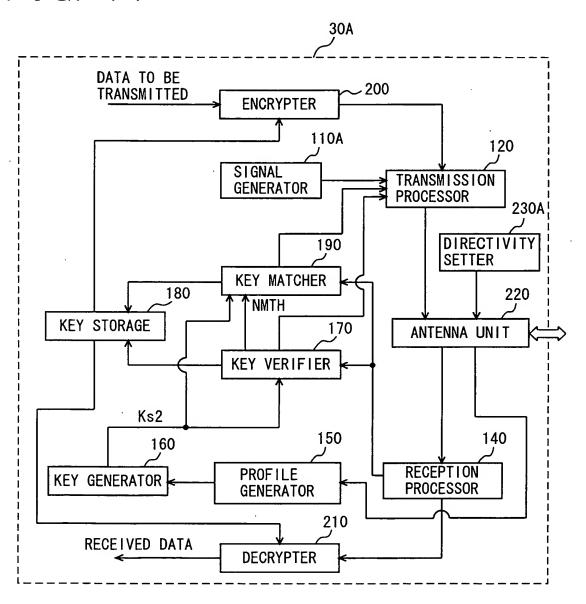


FIG. 12



MAC LAYER PSDU ≧48bit CRC 16bit OMNIPATTERN T5 SFD SIGNAL SERVICE LENGTH 16bit 8bit 8bit 8bit PLCP HEADER 11bit PHYSICAL LAYER DIRECTIVITY PATTERN 121bit 23 PLCP PREAMBLE 05 SYNC 128bit Ξ OMNI-PATTERN DO 36bit 73

FIG. 13

FIG. 14

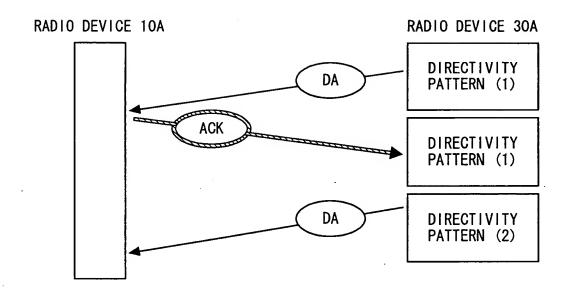


FIG. 15



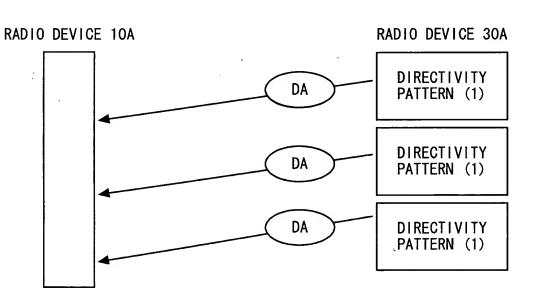


FIG. 16

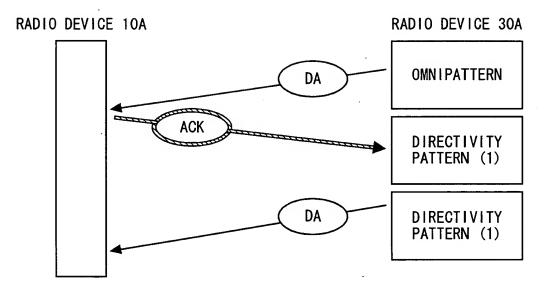

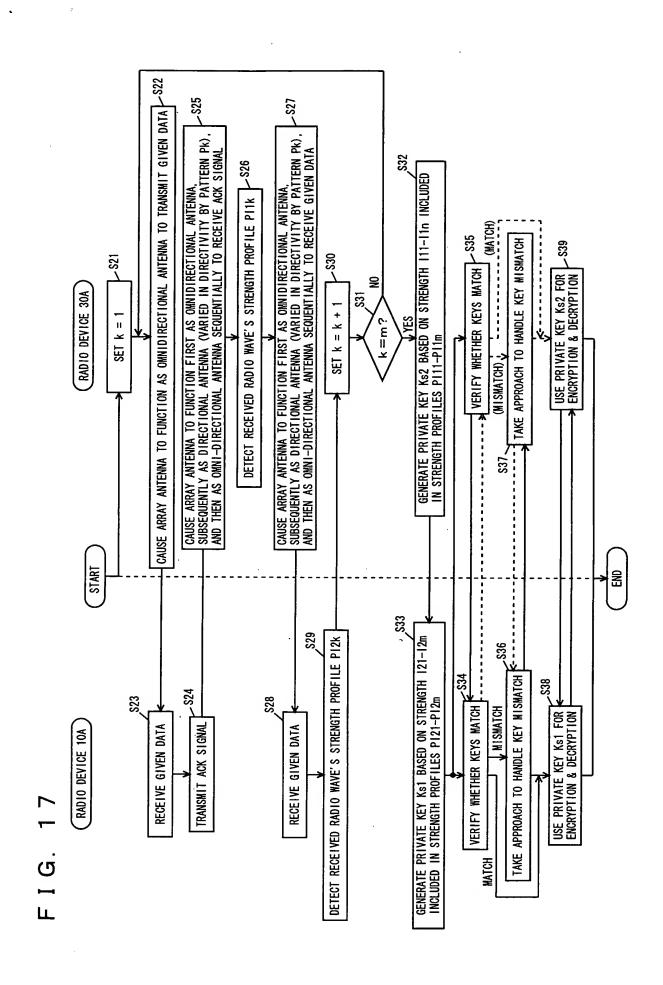

: